



RUTUJA ENTERPRISES

sales@rutujaentp.com



+91-9767874310, +91-9579604299

www.rutujaentp.com

RCK 15




Designed for use with standardised ranges of pulleys, sprockets, and gears, the Keyless Locking elements can accommodate a large range of shaft diameters with a hub of constant bore diameter. On clamping precise axial and radial positioning is provided, combined with medium torque transmission capability.

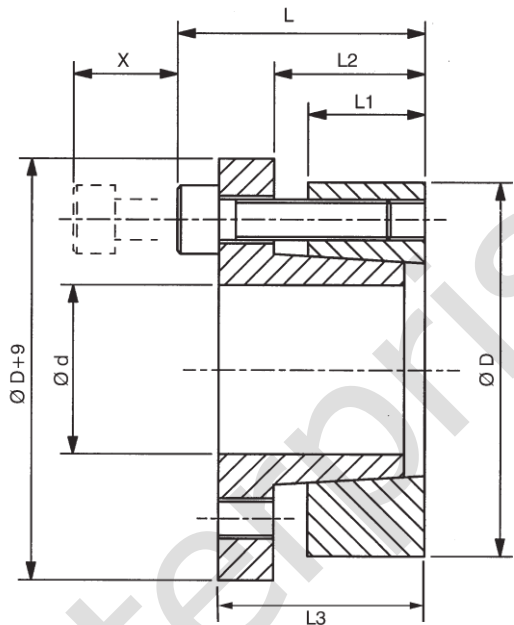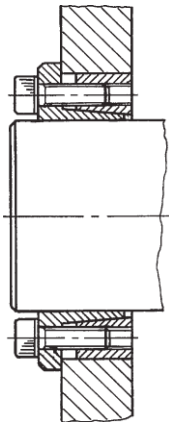


Dimensions

Part No.	Dimensions mm							Torque Cap. M Nm	Axial Force F kN	Surface Pressure		Clamping Screws			Approx. Weight kg	Min. Hub Dia* mm		
	d	D	L	L ₁	L ₂	L ₃	X			Shaft Ps N/mm ²	Hub Ph N/mm ²	No.	Size	Torque Nm		Assy Type A	Assy Type B	Assy Type C
RCK15-14X55	14	55	39	17	22	31	25	282	39	458	118	4	M8	41	0.51	81	75	69
RCK15-16X55	16	55	39	17	22	31	25	313	39	400	118	4	M8	41	0.49	81	75	69
RCK15-18X55	18	55	39	17	22	31	25	353	39	356	118	4	M8	41	0.48	81	75	69
RCK15-19X55	19	55	39	17	22	31	25	372	39	337	118	4	M8	41	0.47	81	75	69
RCK15-20X55	20	55	39	17	22	31	25	392	39	320	118	4	M8	41	0.47	81	75	69
RCK15-22X55	22	55	39	17	22	31	25	431	39	290	118	4	M8	41	0.45	81	75	69
RCK15-24X55	24	55	39	17	22	31	25	470	39	265	118	4	M8	41	0.44	81	75	69
RCK15-25X55	25	55	39	17	22	31	25	490	39	255	118	4	M8	41	0.43	81	75	69
RCK15-28X55	28	55	39	17	22	31	25	549	39	228	118	4	M8	41	0.41	81	75	69
RCK15-30X55	30	55	39	17	22	31	25	588	39	213	118	4	M8	41	0.40	81	75	69
RCK15-24X65	24	65	39	17	22	31	25	617	51	332	122	5	M8	41	0.68	97	89	82
RCK15-25X65	25	65	39	17	22	31	25	637	51	320	122	5	M8	41	0.63	97	89	82
RCK15-28X65	28	65	39	17	22	31	25	725	51	285	122	5	M8	41	0.61	97	89	82
RCK15-30X65	30	65	39	17	22	31	25	764	51	267	122	5	M8	41	0.58	97	89	82
RCK15-32X65	32	65	39	17	22	31	25	823	51	250	122	5	M8	41	0.56	97	89	82
RCK15-35X65	35	65	39	17	22	31	25	902	51	228	122	5	M8	41	0.53	97	89	82
RCK15-38X65	38	65	39	17	22	31	25	970	51	210	122	5	M8	41	0.50	97	89	82
RCK15-40X65	40	65	39	17	22	31	25	1029	51	200	122	5	M8	41	0.47	97	89	82
RCK15-30X80	30	80	41	20	25	33	25	1082	72	315	120	7	M8	41	1.04	119	109	101
RCK15-32X80	32	80	41	20	25	33	25	1155	72	298	120	7	M8	41	1.03	119	109	101
RCK15-35X80	35	80	41	20	25	33	25	1260	72	272	120	7	M8	41	0.98	119	109	101
RCK15-38X80	38	80	41	20	25	33	25	1370	72	250	120	7	M8	41	0.94	119	109	101
RCK15-40X80	40	80	41	20	25	33	25	1440	72	238	120	7	M8	41	0.91	119	109	101
RCK15-42X80	42	80	41	20	25	33	25	1510	72	226	120	7	M8	41	0.89	119	109	101
RCK15-45X80	45	80	41	20	25	33	25	1620	72	212	120	7	M8	41	0.83	119	109	101
RCK15-48X80	48	80	41	20	25	33	25	1735	72	198	120	7	M8	41	0.79	119	109	101
RCK15-50X80	50	80	41	20	25	33	25	1806	72	190	120	7	M8	41	0.74	119	109	101
RCK15-40X80H	40	80	41	20	25	33	25	2157	108	340	169	10	M8	41	0.89	144	126	111
RCK15-45X80H	45	80	41	20	25	33	25	2422	108	302	169	10	M8	41	0.85	144	126	111
RCK15-50X80H	50	80	41	20	25	33	25	2700	108	272	169	10	M8	41	0.78	144	126	111

RCK 13

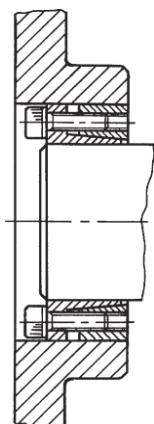


These Keyless Locking elements are very compact units capable of transmitting medium torques. Their design ensures good concentricity between hubs and shafts, without any other means of location. A slight axial movement between hub and shaft occurs during clamping. These units can be installed totally within the hub providing optimum safety, and minimal axial length.

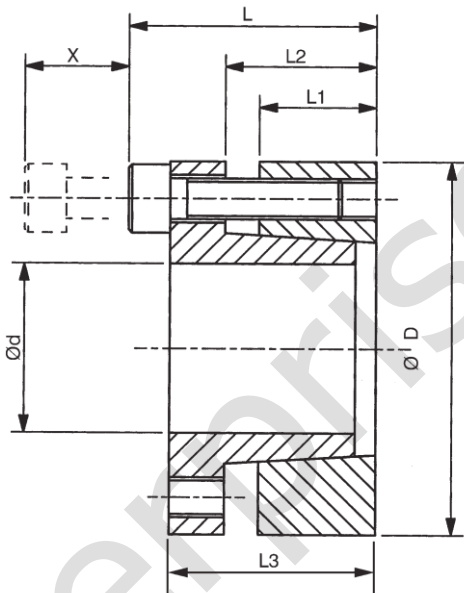


Dimensions

Part No.	Dimensions mm							Torque Cap. M Nm	Axial Force F kN	Surface Pressure		Clamping Screws			Approx. Weight kg	Min. Hub Dia* mm		
	d	D	L	L ₁	L ₂	L ₃	X			Shaft P _s N/mm ²	Hub P _h N/mm ²	No.	Size	Torque Nm		Assy Type A	Assy Type B	Assy Type C
RCK13-18X47	18	47	34	17	22	28	20	350	39	280	120	5	M6	14	0.27	70	64	59
RCK13-19X47	19	47	34	17	22	28	20	355	37	280	120	5	M6	14	0.27	70	64	59
RCK13-20X47	20	47	34	17	22	28	20	360	36	280	120	5	M6	14	0.26	70	64	59
RCK13-22X47	22	47	34	17	22	28	20	400	36	268	123	5	M6	14	0.25	70	65	59
RCK13-24X50	24	50	34	17	22	28	20	440	37	243	120	6	M6	14	0.28	74	68	63
RCK13-25X50	25	50	34	17	22	28	20	560	45	280	138	6	M6	14	0.27	79	72	65
RCK13-28X55	28	55	34	17	22	28	20	625	45	250	128	6	M6	14	0.32	84	77	70
RCK13-30X55	30	55	34	17	22	28	20	650	43	235	128	6	M6	14	0.30	84	77	70
RCK13-32X60	32	60	34	17	22	28	20	950	59	290	150	8	M6	14	0.37	100	89	80
RCK13-35X60	35	60	34	17	22	28	20	1050	60	268	150	8	M6	14	0.34	100	89	80
RCK13-38X65	38	65	34	17	22	28	20	1140	60	252	146	8	M6	14	0.41	106	95	86
RCK13-40X65	40	65	34	17	22	28	20	1200	60	232	146	8	M6	14	0.38	106	95	86
RCK13-45X75	45	75	41	20	25	33	25	2180	97	285	168	7	M8	35	0.63	134	117	104
RCK13-50X80	50	80	41	20	25	33	25	2430	97	258	158	7	M8	35	0.68	137	121	109
RCK13-55X85	55	85	41	20	25	33	25	3050	111	268	173	8	M8	35	0.73	156	135	119
RCK13-60X90	60	90	41	20	25	33	25	3350	112	243	163	8	M8	35	0.78	158	139	123
RCK13-65X95	65	95	41	20	25	33	25	4080	126	253	173	9	M8	35	0.83	174	151	133
RCK13-70X110	70	110	50	24	30	40	30	6280	179	278	178	8	M10	70	1.33	206	177	156
RCK13-75X115	75	115	50	24	30	40	30	6680	178	258	168	8	M10	70	1.39	206	180	159
RCK13-80X120	80	120	50	24	30	40	30	7130	178	248	168	8	M10	70	1.48	215	188	166
RCK13-85X125	85	125	50	24	30	40	30	8450	199	258	178	9	M10	70	1.55	234	202	177
RCK13-90X130	90	130	50	24	30	40	30	9080	202	248	168	9	M10	70	1.63	233	203	180
RCK13-95X135	95	135	50	24	30	40	30	10580	223	258	178	10	M10	70	1.70	253	218	191
RCK13-100X145	100	145	56	26	32	44	35	13380	268	268	188	8	M12	125	2.60	284	241	210
RCK13-110X155	110	155	56	26	32	44	35	14580	265	238	178	8	M12	125	2.80	290	250	219
RCK13-120X165	120	165	56	26	32	44	35	17880	298	248	178	9	M12	125	3.00	309	266	233
RCK13-130X180	130	180	64	34	40	52	35	25950	399	238	168	12	M12	125	4.60	323	282	249
RCK13-140X190	140	190	68	34	40	54	40	26950	385	208	148	9	M14	190	4.90	313	280	253
RCK13-150X200	150	200	68	34	40	54	40	32950	439	228	168	10	M14	190	5.20	358	313	277
RCK13-160X210	160	210	68	34	40	54	40	37900	474	228	168	11	M14	190	5.50	376	329	291
RCK13-170X225	170	225	78	44	50	64	40	44900	528	188	128	12	M14	190	7.70	344	313	287
RCK13-180X235	180	235	78	44	50	64	40	46900	521	168	128	12	M14	190	8.10	359	327	300

RCK 16

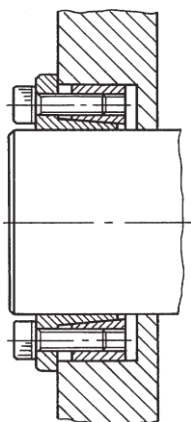


These clamping elements are basically to same design as RCK 13, but with increased diameter flange to locate hub and prevent axial movements, so combining good concentricity with positive axial location. The increase in friction between the cones due to axial restriction results in torque reduction of approx 20%, but this also means reduced surface pressures to both hub and shaft.

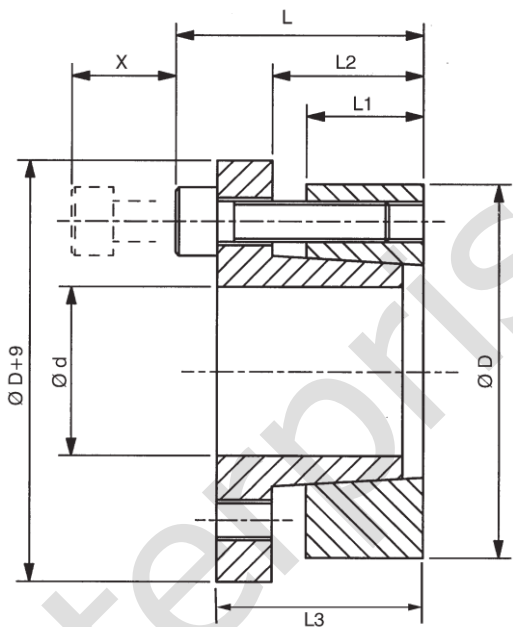


Dimensions

Part No.	Dimensions mm							Torque Cap. M Nm	Axial Force kN	Surface Pressure		Clamping Screws			Approx. Weight kg	Min. Hub Dia* mm		
	d	D	L	L ₁	L ₂	L ₃	X			Shaft P _s N/mm ²	Hub P _h N/mm ²	No.	Size	Torque Nm		Assy Type A	Assy Type B	Assy Type C
RCK16-18X47	18	47	34	17	22	28	20	264	29	215	93	5	M6	17	0.28	63	60	56
RCK16-19X47	19	47	34	17	22	28	20	274	29	215	93	5	M6	17	0.27	63	60	56
RCK16-20X47	20	47	34	17	22	28	20	284	28	215	93	5	M6	17	0.26	63	60	56
RCK16-22X47	22	47	34	17	22	28	20	314	29	196	93	5	M6	17	0.25	63	60	56
RCK16-24X50	24	50	34	17	22	28	20	401	33	215	107	6	M6	17	0.28	71	66	61
RCK16-25X50	25	50	34	17	22	28	20	441	35	210	107	6	M6	17	0.27	71	66	61
RCK16-28X55	28	55	34	17	22	28	20	490	35	196	98	6	M6	17	0.35	75	71	66
RCK16-30X55	30	55	34	17	22	28	20	529	35	186	98	6	M6	17	0.32	75	71	66
RCK16-32X60	32	60	34	17	22	28	20	755	47	210	112	8	M6	17	0.38	86	80	74
RCK16-35X60	35	60	34	17	22	28	20	824	47	186	107	8	M6	17	0.35	85	79	74
RCK16-38X65	38	65	34	17	22	28	20	892	47	191	112	8	M6	17	0.41	94	87	80
RCK16-40X65	40	65	34	17	22	28	20	941	47	186	102	8	M6	17	0.39	90	84	79
RCK16-45X75	45	75	41	20	25	33	25	1716	76	225	132	7	M8	41	0.65	116	106	97
RCK16-50X80	50	80	41	20	25	33	25	1893	76	205	127	7	M8	41	0.69	122	111	102
RCK16-55X85	55	85	41	20	25	33	25	2403	87	210	132	8	M8	41	0.75	132	120	109
RCK16-60X90	60	90	41	20	25	33	25	2648	88	186	122	8	M8	41	0.80	134	123	114
RCK16-65X95	65	95	41	20	25	33	25	3188	98	196	132	9	M8	41	0.85	147	134	122
RCK16-70X110	70	110	50	24	30	40	30	4905	140	215	137	8	M10	83	1.35	174	157	143
RCK16-75X115	75	115	50	24	30	40	30	5150	137	195	127	8	M10	83	1.42	175	160	147
RCK16-80X120	80	120	50	24	30	40	30	5490	137	185	122	8	M10	83	1.51	179	164	151
RCK16-85X125	85	125	50	24	30	40	30	6620	156	195	132	9	M10	83	1.58	194	176	161
RCK16-90X130	90	130	50	24	30	40	30	6960	155	185	127	9	M10	83	1.66	198	181	166
RCK16-95X135	95	135	50	24	30	40	30	8190	172	195	137	10	M10	83	1.73	213	193	176
RCK16-100X145	100	145	56	26	32	44	35	10100	202	205	145	8	M12	145	2.64	236	212	192
RCK16-110X155	110	155	56	26	32	44	35	11030	201	190	135	8	M12	145	2.84	243	220	201
RCK16-120X165	120	165	56	26	32	44	35	13600	227	205	142	9	M12	145	3.05	266	239	217
RCK16-130X180	130	180	64	34	40	52	35	19000	292	186	137	12	M12	145	4.70	284	257	234
RCK16-140X190	140	190	68	34	40	54	40	21800	311	177	127	9	M14	230	4.95	289	264	242
RCK16-150X200	150	200	68	34	40	54	40	25600	341	185	137	10	M14	230	5.30	316	286	260
RCK16-160X210	160	210	68	34	40	54	40	30200	378	185	140	11	M14	230	5.60	336	303	275
RCK16-170X225	170	225	78	44	50	64	40	35000	412	147	110	12	M14	230	7.90	322	298	277
RCK16-180X235	180	235	78	44	50	64	40	37000	411	142	108	12	M14	230	8.30	334	310	289

RCK 70




These Keyless Locking elements are designed to give optimum concentricity, both radially and axially. Similar in design to the RCK 13, but with increased length to provide improved support, and reduced pressures on both shaft and hub. These units must always be installed inside the hub to ensure optimum concentricity. Axial movement of hub will occur during clamping operation.

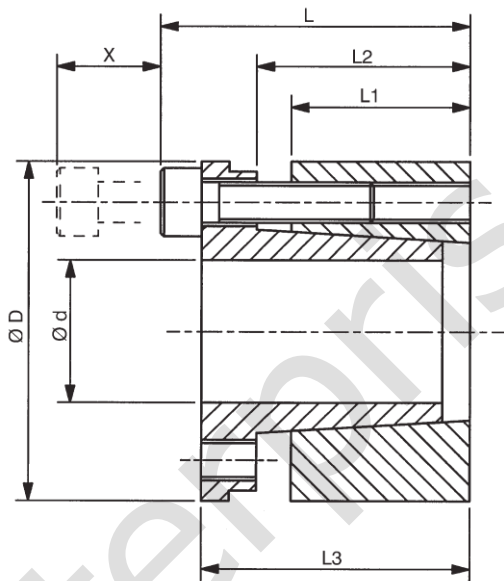


Dimensions

Part No.	Dimensions mm							Torque Cap. M Nm	Axial Force F kN	Surface Pressure		Clamping Screws			Approx. Weight kg	Min. Hub Dia* mm		
	d	D	L	L ₁	L ₂	L ₃	X			Shaft Ps N/mm ²	Hub Ph N/mm ²	No.	Size	Torque Nm		Assy Type A	Assy Type B	Assy Type C
RCK70-19X47	19	47	45	26	31	39	25	403	42	228	98	4	M6	17	0.38	64	60	57
RCK70-20X47	20	47	45	26	31	39	25	443	44	226	98	4	M6	17	0.37	64	60	57
RCK70-22X47	22	47	45	26	31	39	25	510	46	215	93	4	M6	17	0.36	63	60	56
RCK70-24X50	24	50	45	26	31	39	25	607	51	215	102	6	M6	17	0.39	70	65	61
RCK70-25X50	25	50	45	26	31	39	25	689	55	225	102	6	M6	17	0.38	70	65	61
RCK70-28X55	28	55	45	26	31	39	25	826	59	215	107	6	M6	17	0.45	78	72	67
RCK70-30X55	30	55	45	26	31	39	25	865	58	196	117	6	M6	17	0.42	81	74	69
RCK70-32X60	32	60	45	26	31	39	25	1129	71	225	111	8	M6	17	0.52	86	80	74
RCK70-35X60	35	60	45	26	31	39	25	1177	67	196	116	8	M6	17	0.48	88	81	75
RCK70-38X65	38	65	45	26	31	39	25	1451	76	205	121	8	M6	17	0.57	97	89	82
RCK70-40X65	40	65	45	26	31	39	25	1537	77	196	122	8	M6	17	0.54	97	89	82
RCK70-42X75	42	75	55	30	36	47	30	2314	110	232	137	6	M8	41	0.91	119	107	98
RCK70-45X75	45	75	55	30	36	47	30	2657	118	232	137	6	M8	41	0.89	119	107	98
RCK70-48X80	48	80	55	30	36	47	30	2775	116	213	132	6	M8	41	1.00	124	113	103
RCK70-50X80	50	80	55	30	36	47	30	3011	120	213	132	6	M8	41	0.95	124	113	103
RCK70-55X85	55	85	55	30	36	47	30	3729	136	218	142	8	M8	41	1.02	137	123	112
RCK70-60X90	60	90	55	30	36	47	30	3949	132	194	153	8	M8	41	1.11	151	135	121
RCK70-65X95	65	95	55	30	36	47	30	4970	153	208	137	8	M8	41	1.19	150	136	124
RCK70-70X110	70	110	67	40	46	57	35	8128	232	220	140	8	M10	83	2.20	176	159	144
RCK70-75X115	75	115	72	40	46	62	35	8694	232	205	135	8	M10	83	2.53	180	163	149
RCK70-80X120	80	120	72	40	46	62	35	9458	236	196	127	8	M10	83	2.66	183	167	153
RCK70-85X125	85	125	72	40	46	62	35	11167	263	205	142	10	M10	83	2.79	201	181	164
RCK70-90X130	90	130	72	40	46	62	35	11970	266	196	135	10	M10	83	2.93	204	185	168
RCK70-95X135	95	135	72	40	46	62	35	13950	294	205	145	10	M10	83	3.06	220	197	178
RCK70-100X145	100	145	89	46	52	77	45	18295	366	211	145	8	M12	145	4.54	236	212	192
RCK70-110X155	110	155	89	46	52	77	45	20144	366	192	136	8	M12	145	4.92	244	221	201
RCK70-120X165	120	165	89	46	52	77	45	26345	439	211	152	10	M12	145	5.28	277	246	221
RCK70-130X180	130	180	89	46	52	77	45	28135	433	192	137	12	M12	145	5.52	284	257	234
RCK70-140X190	140	190	90	51	59	84	45	36177	517	192	142	8	M14	230	7.25	306	275	250
RCK70-150X200	150	200	90	51	59	84	45	43476	580	201	150	10	M14	230	7.65	333	297	267
RCK70-160X210	160	210	90	51	59	84	45	49466	618	201	150	10	M14	230	8.16	349	311	280
RCK70-170X225	170	225	90	51	59	84	45	44452	523	160	120	12	M14	230	8.75	334	307	283
RCK70-180X235	180	235	90	51	59	84	45	48901	543	157	117	12	M14	230	9.35	345	318	294

RCK 71




The RCK 71 is a type RCK 70 with addition of a distance ring to prevent axial movement of the hub during clamping. Due to the additional friction between the element and hub during clamping maximum torques are reduced, but with reduction in surface pressures also. This design can be mounted within the confines of a hub providing a stepped bore is provided to accommodate the flange.

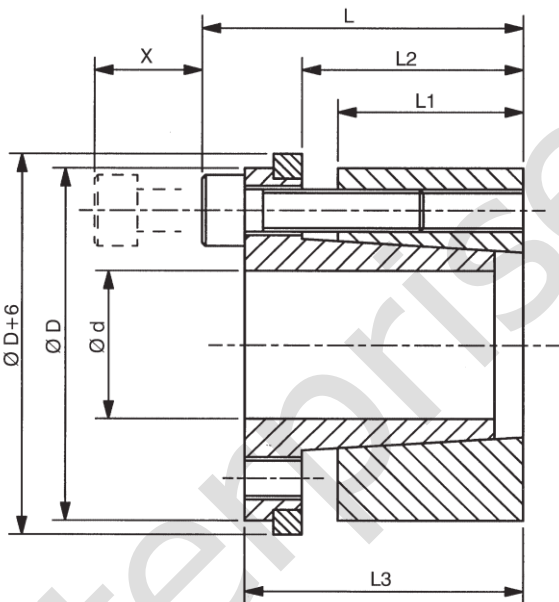

Dimensions


Part No.	Dimensions mm							Torque Cap. M Nm	Axial Force F kN	Surface Pressure		Clamping Screws			Approx. Weight kg	Min. Hub Dia* mm		
	d	D	L	L ₁	L ₂	L ₃	X			Shaft Ps N/mm ²	Hub Ph N/mm ²	No.	Size	Torque Nm		Assy Type A	Assy Type B	Assy Type C
RCK71-19X47	19	47	45	26	31	39	25	294	31	228	96	4	M6	17	0.39	64	60	56
RCK71-20X47	20	47	45	26	31	39	25	313	31	226	96	4	M6	17	0.38	64	60	56
RCK71-22X47	22	47	45	26	31	39	25	362	33	206	97	4	M6	17	0.37	64	60	56
RCK71-24X50	24	50	45	26	31	39	25	421	35	206	100	6	M6	17	0.41	69	65	60
RCK71-25X50	25	50	45	26	31	39	25	470	38	221	110	6	M6	17	0.40	72	66	62
RCK71-28X55	28	55	45	26	31	39	25	578	41	202	105	6	M6	17	0.48	77	72	67
RCK71-30X55	30	55	45	26	31	39	25	637	42	221	118	6	M6	17	0.45	81	75	69
RCK71-32X60	32	60	45	26	31	39	25	784	49	197	114	8	M6	17	0.56	87	80	75
RCK71-35X60	35	60	45	26	31	39	25	843	48	202	118	8	M6	17	0.52	88	81	75
RCK71-38X65	38	65	45	26	31	39	25	1010	53	197	121	8	M6	17	0.62	97	89	82
RCK71-40X65	40	65	45	26	31	39	25	1108	55	234	143	8	M6	17	0.59	105	94	86
RCK71-42X75	42	75	55	30	36	47	30	1892	90	216	135	6	M8	41	0.97	118	107	97
RCK71-45X75	45	75	55	30	36	47	30	1912	85	216	135	6	M8	41	0.95	118	107	97
RCK71-48X80	48	80	55	30	36	47	30	2137	89	221	142	6	M8	41	1.07	129	116	105
RCK71-50X80	50	80	55	30	36	47	30	2167	87	221	143	6	M8	41	1.02	129	116	105
RCK71-55X85	55	85	55	30	36	47	30	2677	97	221	143	8	M8	41	1.09	137	124	112
RCK71-60X90	60	90	55	30	36	47	30	2853	95	197	131	8	M8	41	1.19	139	126	116
RCK71-65X95	65	95	55	30	36	47	30	3500	108	206	142	8	M8	41	1.27	153	138	125
RCK71-70X110	70	110	67	40	46	57	35	5717	163	221	142	8	M10	83	2.03	177	159	145
RCK71-75X115	75	115	72	40	46	62	35	6207	166	216	148	8	M10	83	2.65	190	170	153
RCK71-80X120	80	120	72	40	46	62	35	6707	168	198	139	8	M10	83	2.78	191	172	157
RCK71-85X125	85	125	72	40	46	62	35	8002	188	216	157	10	M10	83	2.92	214	189	169
RCK71-90X130	90	130	72	40	46	62	35	8502	189	197	143	10	M10	83	3.07	210	189	171
RCK71-95X135	95	135	72	40	46	62	35	10002	211	187	138	10	M10	83	3.21	214	193	176
RCK71-100X145	100	145	89	46	52	77	45	13336	267	197	148	8	M12	145	4.80	239	214	193
RCK71-110X155	110	155	89	46	52	77	45	14582	265	197	178	8	M12	145	5.20	290	250	219
RCK71-120X165	120	165	89	46	52	77	45	19083	318	216	158	10	M12	145	5.58	283	251	224
RCK71-130X180	130	180	89	46	52	77	45	20417	314	198	143	12	M12	145	5.86	291	262	237
RCK71-140X190	140	190	90	51	59	84	45	24920	356	188	138	8	M14	230	7.62	301	272	248
RCK71-150X200	150	200	90	51	59	84	45	30130	402	198	149	10	M14	230	8.04	331	296	266
RCK71-160X210	160	210	90	51	59	84	45	32520	407	198	149	10	M14	230	8.56	348	311	280
RCK71-170X225	170	225	90	51	59	84	45	33350	392	158	119	12	M14	230	9.19	333	306	282
RCK71-180X235	180	235	90	51	59	84	45	33600	373	154	119	12	M14	230	9.83	347	319	295

RCK 80

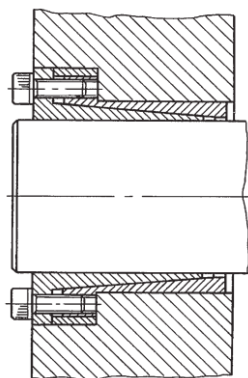

Available for shaft diameters down to 6mm, these Keyless Locking elements are designed to fit into small diameter hubs, being particularly suited to light duty, light torque applications. A spacer ring prevents axial movement during clamping; and design ensures good levels of concentricity.


For correct operation of these units, the hub diameter should not be less than the flange diameter D_2 , even though with many materials stress limits would allow selection of smaller hub diameters.

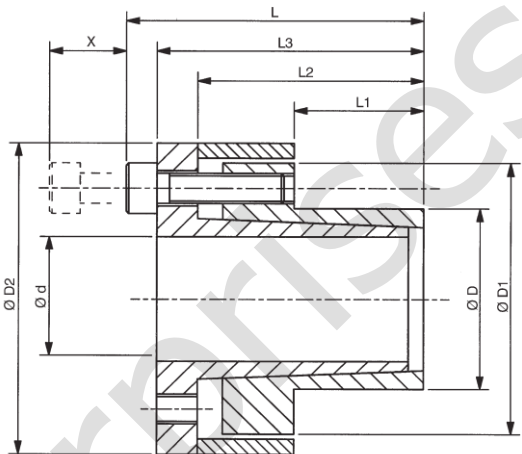



Dimensions

Part No.	Dimensions mm										Torque Cap. M Nm	Axial Force F kN	Surface Press.		Clamping Screws			Approx Weight kg	Min. Hub Dia* mm		
	d	D	D ₁	D ₂	L	L ₁	L ₂	L ₃	X	Shaft Ps N/mm²			Hub Ph N/mm²	No.	Size	Torque Nm	Assy Type A		Assy Type B	Assy Type C	
RCK80-6X14	6	14	23	25	25.5	10.0	18.5	22.5	10	12	4	187	80	3	M3	2.2	0.04	18	18	17	
RCK80-8X15	8	15	24	27	29.5	12.0	21.5	25.5	12	28	7	206	110	3	M4	5	0.05	22	20	19	
RCK80-9X16	9	16	25	28	31.5	14.0	23.5	27.5	12	31	7	206	85	3	M4	5	0.07	21	20	19	
RCK80-10X16	10	16	25	28	31.5	14.0	23.5	27.5	12	35	7	151	85	3	M4	5	0.06	21	20	19	
RCK80-11X18	11	18	28	32	31.5	14.0	23.5	27.5	12	51	7	136	105	4	M4	5	0.09	21	20	19	
											9	172						26	24	22	
RCK80-12X18	12	18	28	32	31.5	14.0	23.5	27.5	12	56	9	150	100	4	M4	5	0.08	25	24	22	
RCK80-14X23	14	23	35	39	31.5	14.0	23.5	27.5	12	69	9	150	80	4	M4	5	0.18	30	29	27	
RCK80-15X24	15	24	40	45	42.5	16.0	29.5	36.5	18	170	10	131	98	4	M6	17	0.22	33	31	29	
RCK80-16X24	16	24	40	45	42.5	16.0	29.5	36.5	18	180	23	157	98	4	M6	17	0.21	33	31	29	
RCK80-17X26	17	26	42	47	45.5	19.0	32.5	39.5	18	200	23	147	125	4	M6	17	0.21	40	36	33	
RCK80-18X26	18	26	42	47	45.5	19.0	32.5	39.5	18	200	24	191	125	4	M6	17	0.24	40	36	33	
											22	181									
RCK80-19X27	19	27	43	49	45.5	19.0	32.5	39.5	18	210	22	171	120	4	M6	17	0.25	40	37	34	
RCK80-20X28	20	28	44	50	45.5	19.0	32.5	39.5	18	219	22	161	115	4	M6	17	0.26	41	38	35	
RCK80-22X32	22	32	48	54	52.5	26.0	39.5	46.5	18	250	22	161	80	4	M6	17	0.35	42	40	38	
RCK80-24X34	24	34	50	56	52.5	26.0	39.5	46.5	18	392	23	116	102	6	M6	17	0.36	48	45	42	
											33	145									
RCK80-25X34	25	34	50	56	52.5	26.0	39.5	46.5	18	411	33	139	102	6	M6	17	0.40	48	45	42	
RCK80-28X39	28	39	55	61	52.5	25.5	39.5	46.5	18	460	33	139	98	6	M6	17	0.42	54	50	47	
RCK80-30X41	30	41	57	62	52.5	25.5	39.5	46.5	18	510	33	137	90	6	M6	17	0.44	55	52	49	
RCK80-32X43	32	43	59	65	52.5	25.5	39.5	46.5	18	701	34	123	108	8	M6	17	0.46	61	57	53	
											44	145									
RCK80-35X47	35	47	62	69	58.5	31.5	45.5	52.5	18	720	41	107	80	8	M6	17	0.57	61	58	55	
RCK80-38X50	38	50	66	72	58.5	31.5	45.5	52.5	18	781	41	107	76	8	M6	17	0.60	64	61	58	
RCK80-40X53	40	53	69	75	58.5	31.5	45.5	52.5	18	768	41	100	72	8	M6	17	0.66	67	64	61	
RCK80-42X55	42	55	71	78	58.5	31.5	45.5	52.5	18	863	38	95	70	8	M6	17	0.71	69	66	63	
RCK80-45X59	45	59	80	86	79.0	45.0	62.5	71.0	22	1711	41	92	85	8	M8	41	1.14	78	74	70	
											76	111									
RCK80-48X62	48	62	81	87	79.0	45.0	62.5	71.0	22	1824	76	103	80	8	M8	41	1.40	80	76	73	
RCK80-50X65	50	65	86	92	79.0	45.0	62.5	71.0	22	1902	76	103	75	8	M8	41	1.58	83	79	75	
RCK80-55X71	55	71	92	98	89.0	55.0	72.5	81.0	22	2353	76	98	65	9	M8	41	2.00	88	84	81	
RCK80-60X77	60	77	98	104	89.0	55.0	72.5	81.0	22	2569	86	84	60	9	M8	41	2.30	93	90	87	
											86	77									
RCK80-65X84	65	84	105	111	89.0	55.0	72.5	81.0	22	2786	86	71	55	9	M8	41	2.50	100	97	94	
RCK80-70X90	70	90	113	119	106.5	65.0	86.5	96.5	25	4755	86	71	70	9	M10	83	2.83	113	108	103	
RCK80-75X95	75	95	119	126	106.5	65.0	86.5	96.5	25	5100	136	90	65	9	M10	83	3.10	117	112	108	
RCK80-80X100	80	100	125	131	106.5	65.0	86.5	96.5	25	7250	136	82	80	12	M10	83	3.27	129	123	117	
RCK80-85X106	85	106	131	137	106.5	65.0	86.5	96.5	25	7700	181	100	75	12	M10	83	3.50	135	129	123	
											181	94									
RCK80-90X112	90	112	137	144	106.5	65.0	86.5	96.5	25	8160	181	93	75	12	M10	83	3.80	143	136	129	
RCK80-95X120	95	120	142	149	106.5	65.0	86.5	96.5	25	10800	181	93	80	14	M10	83	4.20	155	147	140	
RCK80-100X125	100	125	147	154	106.5	65.0	86.5	96.5	25	14800	227	101	95	18	M10	83	4.90	170	160	150	
RCK80-110X140	110	140	172	180	140.0	90.0	86.5	128	30	16000	296	119	93	12	M12	145	5.80	189	178	167	
RCK80-120X155	120	155	190	198	140.0	90.0	86.5	128	30	17400	291	118	93	12	M12	145	6.60	209	197	185	
											290	120									

RCK 61

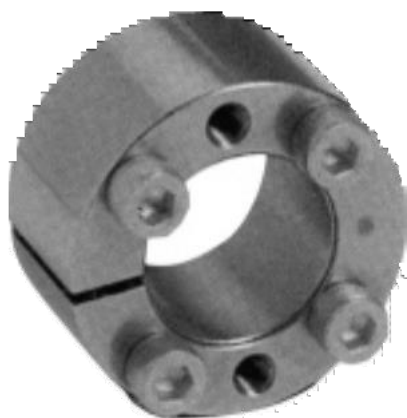


Available for shaft diameters from 10mm, these clamping elements are designed for small low torque applications providing concentric connection of components to shafting. The thin wall design combined with low hub pressures enable use within small hub diameters. The design is intended that the units fit totally within the hub bore to provide safe surface. Some axial movement will occur when the units are clamped.

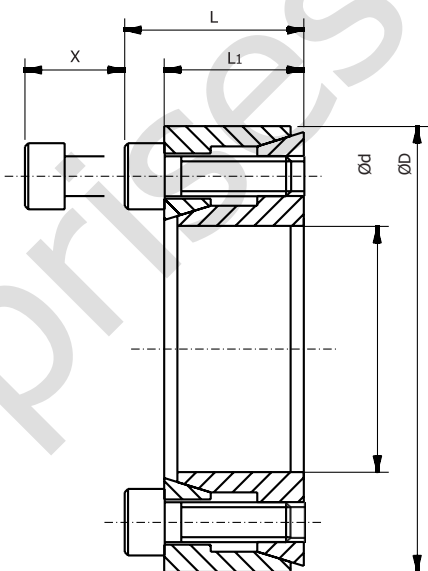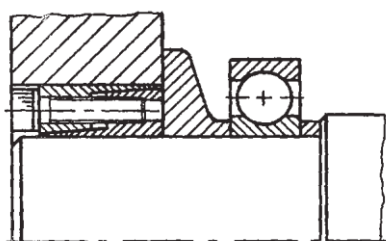


Dimensions

Part No.	Dimensions mm					Torque Cap. M Nm	Axial Force F kN	Surface Press.		Clamping Screws			Extraction Screws		Approx Weight kg	Min. Hub Dia* mm		
	d	D	L	L1	X			Shaft Ps N/mm ²	Hub Ph N/mm ²	No.	Size	Torque Nm	Size	No.		Assy Type A	Assy Type B	Assy Type C
RCK61-10X20	10	20	15.5	13	12	15	3	110	55	4	M2.5	1.2	M2.5	2	0.08	24	23	22
RCK61-12X22	12	22	15.5	13	12	20	3	92	50	4	M2.5	1.2	M2.5	2	0.09	26	25	24
RCK61-14X26	14	26	20	17	16	35	5	102	55	4	M3	2.1	M3	2	0.12	31	30	29
RCK61-15X28	15	28	20	17	16	40	5	93	50	4	M3	2.1	M3	2	0.13	33	32	31
RCK61-16X32	16	32	21	17	16	70	9	130	65	4	M4	4.9	M4	2	0.15	39	38	36
RCK61-18X35	18	35	25	21	20	80	9	117	60	4	M4	4.9	M4	2	0.20	42	41	39
RCK61-19X35	19	35	25	21	20	85	9	111	60	4	M4	4.9	M4	2	0.19	42	41	39
RCK61-20X38	20	38	26	21	20	220	22	219	115	6	M5	9.7	M5	3	0.21	55	51	47
RCK61-22X40	22	40	26	21	20	240	22	200	110	6	M5	9.7	M5	3	0.22	57	53	49
RCK61-24X47	24	47	32	26	25	380	32	215	110	6	M6	16.2	M6	3	0.31	67	62	58
RCK61-25X47	25	47	32	26	25	390	31	207	110	6	M6	16.2	M6	3	0.30	67	62	58

RCK 40

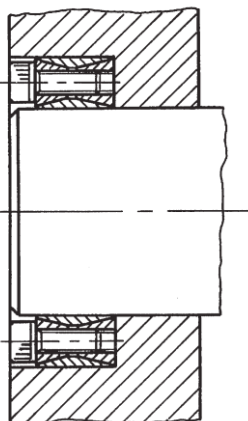


These are the original type of Keyless Locking elements, proven in a wide range of applications for more than 20 years. Suited to more general applications, this series provides medium torque transmission, which can be increased by mounting the unit in series. This type does not provide self centring, and therefore other methods of centring the hub to the shaft are required. The units do not move axially during clamping and generally self-release when clamping screws are relaxed.

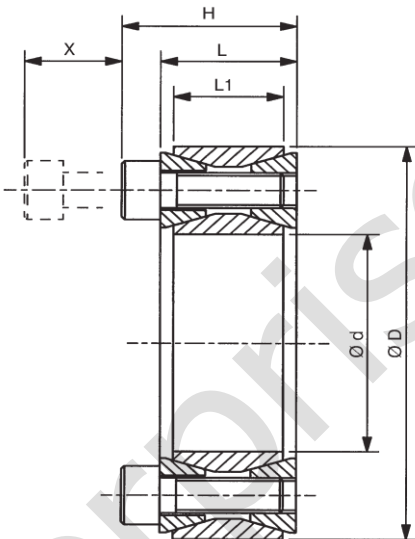


Dimensions

Part No. †	Dimensions mm						Torque Cap. M Nm	Axial Force F kN	Surface Press.		Clamping Screws			Extraction Screws		Approx Weight kg	Min. Hub Dia* mm		
	d	D	L	L ₁	H	X			Shaft Ps N/mm ²	Hub Ph N/mm ²	No.	Size	Torque Nm	Size	No.		Assy Type A	Assy Type B	Assy Type C
RCK40-18X47	18	47	20	17	28	18	250	28	235	92	8	M5	15	M8	2	0.26	63	59	56
RCK40-19X47	19	47	20	17	28	18	265	28	235	92	8	M6	15	M8	2	0.25	63	59	56
RCK40-20X47	20	47	20	17	28	18	280	28	208	92	8	M6	15	M8	2	0.24	63	59	56
RCK40-22X47	22	47	20	17	28	18	310	28	192	92	8	M6	15	M8	2	0.23	63	59	56
RCK40-24X50	24	50	20	17	28	18	370	31	192	94	9	M6	15	M8	3	0.26	68	64	60
RCK40-25X50	25	50	20	17	28	18	390	31	187	94	9	M6	15	M8	3	0.25	68	64	60
RCK40-28X55	28	55	20	17	28	18	490	35	153	94	10	M6	15	M8	4	0.30	74	70	66
RCK40-30X55	30	55	20	17	28	18	520	35	173	94	10	M6	15	M8	4	0.29	74	70	66
RCK40-32X60	32	60	20	17	28	18	680	43	205	105	12	M6	15	M8	4	0.34	84	79	73
RCK40-35X60	35	60	20	17	28	18	710	41	180	105	12	M6	15	M8	4	0.32	84	79	73
RCK40-38X65	38	65	20	17	28	18	880	46	176	108	14	M6	15	M8	4	0.36	92	86	80
RCK40-40X65	40	65	20	17	28	18	930	47	176	108	14	M6	15	M8	4	0.34	92	86	80
RCK40-42X75	42	75	20	17	28	18	1580	75	235	123	12	M8	15	M8	4	0.60	112	103	95
RCK40-45X75	45	75	24	20	34	22	1620	72	206	123	12	M8	37	M10	4	0.57	112	103	95
RCK40-48X80	48	80	24	20	34	22	1690	70	186	108	12	M8	37	M10	4	0.63	114	106	98
RCK40-50X80	50	80	24	20	34	22	1770	71	187	113	12	M8	37	M10	4	0.60	116	107	99
RCK40-55X85	55	85	24	20	34	22	2260	82	196	127	14	M8	37	M10	4	0.63	129	118	108
RCK40-60X90	60	90	24	20	34	22	2450	82	177	120	14	M8	37	M10	4	0.69	133	123	113
RCK40-65X95	65	95	24	20	34	22	3040	94	188	128	16	M8	37	M10	4	0.73	145	132	121
RCK40-70X110	70	110	28	24	40	25	4560	130	206	127	14	M10	70	M12	4	1.26	167	153	140
RCK40-75X115	75	115	28	24	40	25	4820	129	191	124	14	M10	70	M12	4	1.33	173	158	146
RCK40-80X120	80	120	28	24	40	25	5130	128	177	120	14	M10	70	M12	4	1.40	178	164	151
RCK40-85X125	85	125	28	24	40	25	6230	147	191	127	16	M10	70	M12	4	1.49	190	174	159
RCK40-90X130	90	130	28	24	40	25	6520	145	176	122	16	M10	70	M12	4	1.53	194	178	164
RCK40-95X135	95	135	28	24	40	25	7770	164	191	133	18	M10	70	M12	4	1.62	210	191	174
RCK40-100X145	100	145	33	26	47	30	9460	189	193	133	14	M12	127	M14	4	2.01	226	205	187
RCK40-110X155	110	155	33	26	47	30	10490	191	176	122	14	M12	127	M14	4	2.15	232	212	196
RCK40-120X165	120	165	33	26	47	30	12945	216	182	133	16	M12	127	M14	4	2.35	257	233	213
RCK40-130X180	130	180	38	34	52	35	17360	267	163	113	20	M12	127	M14	4	3.51	260	241	223
RCK40-140X190	140	190	38	34	52	35	20650	295	163	123	22	M12	127	M14	4	3.85	285	261	240
RCK40-150X200	150	200	38	34	52	35	23815	318	166	122	24	M12	127	M14	4	4.07	299	274	252
RCK40-160X210	160	210	38	34	52	35	27615	345	166	127	26	M12	127	M14	4	4.30	320	292	268
RCK40-170X225	170	225	44	38	60	40	32370	381	157	118	22	M14	195	M16	4	5.78	331	305	282
RCK40-180X235	180	235	44	38	60	40	37270	414	163	123	24	M14	195	M16	4	6.05	352	323	297
RCK40-190X250	190	250	52	46	68	45	45810	482	148	113	28	M14	195	M16	4	8.25	362	334	310
RCK40-200X260	200	260	52	46	68	45	51600	516	148	113	30	M14	195	M16	5	8.65	376	348	322
RCK40-220X285	220	285	56	50	74	50	66800	607	148	113	26	M16	290	M18	4	11.25	412	381	353
RCK40-240X305	240	305	56	50	74	50	93200	777	178	140	28	M16	290	M18	4	12.25	488	440	399
RCK40-260X325	260	325	56	50	74	50	114500	881	188	150	30	M16	290	M18	4	13.25	540	482	434
RCK40-280X355	280	355	66	60	89	60	141000	1007	165	130	26	M18	410	M20	4	17.00	546	497	455

RCK 11

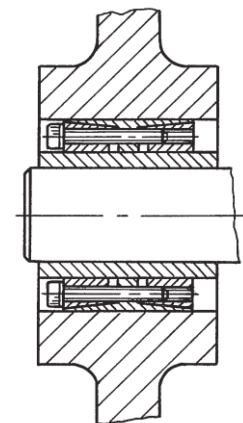

These Keyless Locking elements provide maximum torque transmission from a single unit, but, due to their large clamping surfaces clamping pressures are kept to reasonable levels. The design enables automatic centring between shaft and hub, and axial positioning of the hub does not change during clamping. Suitable for applications with high bending loads.

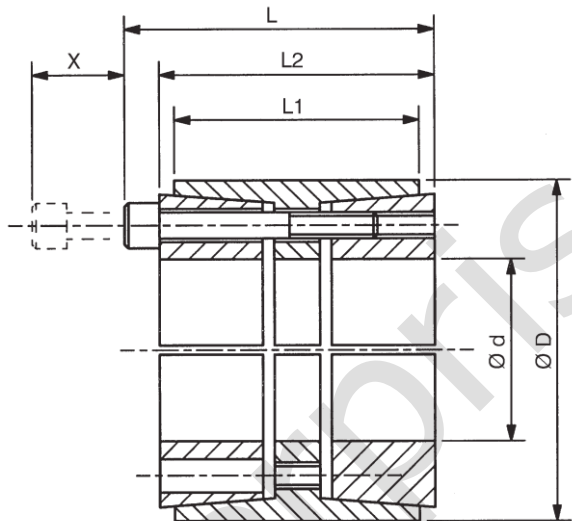




Dimensions

Part No.	Dimensions mm						Torque Cap. M Nm	Axial Force F kN	Surface Press.		Clamping Screws			Extraction Screws		Approx Weight kg	Min. Hub Dia* mm		
	d	D	L	L ₁	L ₂	X			Shaft P _s N/mm ²	Hub P _h N/mm ²	No.	Size	Torque Nm	Size	No.		Assy Type A	Assy Type B	Assy Type C
RCK11-25X55	25	55	46	32	40	35	784	63	291	99	6	M6	17	M6	3	0.39	76	71	66
RCK11-28X55	28	55	46	32	40	35	882	63	259	99	6	M6	17	M6	3	0.37	76	71	66
RCK11-30X55	30	55	46	32	40	35	931	62	243	99	6	M6	17	M6	3	0.35	76	71	66
RCK11-35X60	35	60	60	44	54	45	1274	73	161	85	7	M6	17	M6	3	0.62	79	74	70
RCK11-38X75	38	75	62	44	54	50	2696	142	289	113	7	M8	41	M8	3	1.02	108	100	93
RCK11-40X75	40	75	62	44	54	50	2843	142	276	113	7	M8	41	M8	3	0.96	108	100	93
RCK11-42X75	42	75	62	44	54	50	2981	142	262	113	7	M8	41	M8	3	0.91	108	100	93
RCK11-45X75	45	75	62	44	54	50	3196	142	246	113	7	M8	41	M8	3	0.89	108	100	93
RCK11-48X80	48	80	62	44	54	50	3873	161	203	96	8	M8	41	M8	3	1.10	109	102	96
RCK11-50X80	50	80	72	56	64	50	4069	163	196	96	8	M8	41	M8	3	1.30	109	102	96
RCK11-55X85	55	85	72	56	64	50	5050	184	201	101	9	M8	41	M8	3	1.40	118	110	103
RCK11-60X90	60	90	72	56	64	50	6080	203	198	103	10	M8	41	M8	4	1.50	126	117	109
RCK11-65X95	65	95	72	56	64	50	6619	204	183	98	10	M8	41	M8	4	1.60	130	122	114
RCK11-70X110	70	110	88	70	78	60	11277	322	218	111	10	M10	83	M10	4	3.00	158	146	136
RCK11-75X115	75	115	88	70	78	60	12062	322	218	111	10	M10	83	M10	4	3.20	165	153	142
RCK11-80X120	80	120	88	70	78	60	14219	355	210	112	11	M10	83	M10	4	3.50	173	160	149
RCK11-85X125	85	125	88	70	78	60	15102	355	210	112	12	M10	83	M10	5	3.70	180	167	155
RCK11-90X130	90	130	88	70	78	60	17455	388	203	112	12	M10	83	M10	5	3.90	187	173	161
RCK11-95X135	95	135	88	70	78	60	18338	386	203	112	12	M10	83	M10	5	4.10	195	180	167
RCK11-100X145	100	145	112	90	100	80	25791	516	196	104	11	M12	145	M12	4	6.00	203	189	177
RCK11-110X155	110	155	112	90	100	80	31184	567	194	107	12	M12	145	M12	5	7.00	219	204	190
RCK11-120X165	120	165	112	90	100	80	39618	660	207	117	14	M12	145	M12	5	7.80	242	223	206
RCK11-130X180	130	180	130	104	116	90	50503	777	188	109	12	M14	230	M14	5	10.00	257	238	221
RCK11-140X190	140	190	130	104	116	90	63470	907	204	121	14	M14	230	M14	7	11.00	283	260	239
RCK11-150X200	150	200	130	104	116	90	72790	971	204	124	15	M14	230	M14	6	12.00	301	276	253
RCK11-160X210	160	210	130	104	116	90	82890	1036	204	125	16	M14	230	M14	7	13.00	317	290	267
RCK11-170X225	170	225	164	134	148	110	106000	1247	178	110	14	M16	355	M16	6	18.00	322	298	277
RCK11-180X235	180	235	164	134	148	110	120900	1343	180	112	15	M16	355	M16	7	20.00	339	313	291
RCK11-190X250	190	250	164	134	148	110	131250	1382	182	113	16	M16	355	M16	7	22.00	362	334	310
RCK11-200X260	200	260	164	134	148	110	143220	1432	173	110	16	M16	355	M16	7	24.00	372	345	321
RCK11-220X285	220	285	164	134	148	110	177560	1614	184	112	18	M16	355	M16	8	27.00	411	380	353
RCK11-240X305	240	305	164	134	148	110	213850	1782	180	116	20	M16	355	M16	9	30.00	446	411	380
RCK11-260X325	260	325	164	134	148	110	245250	1887	174	114	21	M16	355	M16	10	33.00	472	436	404
RCK11-280X355	280	355	197	165	177	130	353160	2523	181	115	18	M20	690	M20	8	48.00	517	477	442
RCK11-300X375	300	375	197	165	177	130	419860	2799	188	120	20	M20	690	M20	9	52.00	556	511	471

RCK 50



These Keyless Locking elements consist of just two conical rings which require the minimum of radial space, so providing compact assemblies, and enabling use within small hub diameters. The design offers the maximum versatility of design, but does require the customer to provide their own thrust ring assembly. Whilst only providing low torque transmission per unit they can be combined (up to 4 units) to increase torque capacity. When fully clamped these units provide excellent gastight sealing. Many designs of thrust rings are possible and sketches to the left are two typical designs. These units do not self centre, so require external means of centring the hub.

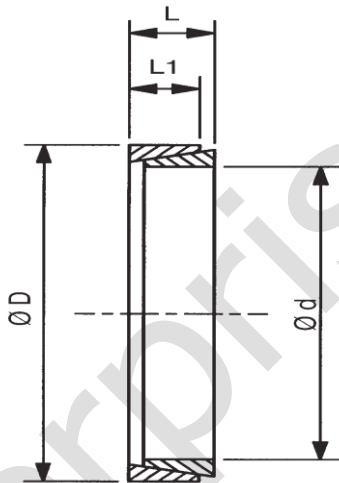


Dimensions

Part No. †	Dimensions mm				Torque Cap. M Nm	Axial Force F kN	Surface Pressure		Axial Force necessary to clamp kN	Approx. Weight gms	Min. Hub Dia* mm		
	d	D	L	L1			Shaft Ps N/mm²	Hub Ph N/mm²			Assy Type A	Assy Type B	Assy Type C
RCK50-6X9	6	9	4.5	3.7	2.4	0.8	115	75	3.8	1.2	11.5	10.9	10.4
RCK50-7X10	7	10	4.5	3.7	3.0	0.9	105	70	3.9	1.4	12.5	12.0	11.5
RCK50-8X11	8	11	4.5	3.7	4.7	1.2	120	90	5.3	1.5	14.7	13.9	13.1
RCK50-9X12	9	12	4.5	3.7	7.9	1.8	140	105	15.6	1.7	16.9	15.8	14.7
RCK50-10X13	10	13	4.5	3.7	9.5	1.9	135	105	15.6	1.8	18.3	17.1	15.9
RCK50-12X15	12	15	4.5	3.7	11.4	1.9	115	90	15.6	2.2	20.1	18.9	17.8
RCK50-13X16	13	16	4.5	3.7	13.1	2.0	110	90	15.6	2.3	21.4	20.2	19.0
RCK50-14X18	14	18	6.3	5.3	22.3	3.2	115	90	25.4	4.9	24.1	22.7	21.4
RCK50-15X19	15	19	6.3	5.3	24.3	3.2	110	85	25.4	5.3	25.0	23.6	22.4
RCK50-16X20	16	20	6.3	5.3	27.3	3.4	105	85	25.4	5.5	26.3	24.9	23.5
RCK50-17X21	17	21	6.3	5.3	29.8	3.5	105	85	25.4	5.8	27.6	26.1	24.7
RCK50-18X22	18	22	6.3	5.3	32.4	3.6	100	80	25.4	6.1	28.5	27.1	25.6
RCK50-19X24	19	24	6.3	5.3	49.0	5.2	140	110	36.0	7.8	34.4	31.9	29.6
RCK50-20X25	20	25	6.3	5.3	53.0	5.3	135	105	36.0	8.2	35.2	32.8	30.6
RCK50-22X26	22	26	6.3	5.3	66.0	6.0	135	115	36.0	7.3	37.9	35.0	32.4
RCK50-24X28	24	28	6.3	5.3	73.0	6.1	130	110	36.0	8.0	40.1	37.2	34.6
RCK50-25X30	25	30	6.3	5.3	72.0	5.8	115	95	36.0	10.1	40.8	38.3	36.0
RCK50-28X32	28	32	6.3	5.3	86.0	6.1	115	100	36.0	9.2	44.3	41.4	38.7
RCK50-30X35	30	35	6.3	5.3	91.0	6.1	100	85	36.0	12.0	46.0	43.5	41.2
RCK50-32X36	32	36	6.3	5.3	131.0	8.2	130	115	45.0	10.0	52.5	48.4	44.9
RCK50-35X40	35	40	7	6.0	171.0	9.8	125	110	54.0	17.0	57.3	53.1	49.4
RCK50-36X42	36	42	7	6.0	169.0	9.4	115	100	54.0	20.0	58.1	54.3	50.8
RCK50-38X44	38	44	7	6.0	181.0	9.5	110	95	54.0	21.0	59.8	56.1	52.7
RCK50-40X45	40	45	8	6.6	231.0	11.6	115	105	66.0	23.0	63.3	58.9	55.0
RCK50-42X48	42	48	8	6.6	235.0	11.2	110	95	66.0	28.0	65.2	61.2	57.5
RCK50-45X52	45	52	10	8.6	390.0	19.0	116	105	110.0	42.0	73.2	68.1	63.5
RCK50-48X55	48	55	10	8.6	572.0	23.8	155	135	132.0	45.0	86.3	78.2	71.3
RCK50-50X57	50	57	10	8.6	602.0	24.1	150	130	132.0	47.0	87.8	79.9	73.1
RCK50-55X62	55	62	10	8.6	670.0	24.4	140	125	132.0	50.0	93.7	85.7	78.8
RCK50-56X64	56	64	12	10.4	790.0	28.2	130	115	158.0	67.0	93.3	86.1	79.7
RCK50-60X68	60	68	12	10.4	860.0	28.7	125	110	158.0	72.0	97.4	90.2	83.9
RCK50-63X71	63	71	12	10.4	945.0	30.0	125	110	160.0	76.0	101.6	94.2	87.6
RCK50-65X73	65	73	12	10.4	1000	30.8	125	110	160	78	104.5	96.9	90.0
RCK50-70X79	70	79	14	12.2	1300	37.1	125	110	200	110	113.1	104.8	97.4
RCK50-71X80	71	80	14	12.2	1340	37.7	125	110	200	114	114.5	106.1	98.7
RCK50-75X84	75	84	14	12.2	1500	40.0	125	110	220	118	120.2	111.4	103.6
RCK50-80X91	80	91	17	14.8	2100	52.5	125	110	300	187	130.3	120.7	112.2

RCK 19

Type RCK 19 are normally referred to as Clamping Discs, used to clamp externally onto thin walled hubs to lock them to the shaft. The design permits the use of large diameter shafts with small hub sizes, and is popular for connection of large sprocket and pulleys. The design provides for optimum concentricity, with high torque transmission. A number of shaft diameters can be accommodated by one size of unit, max., min. and an intermediate being shown in table.

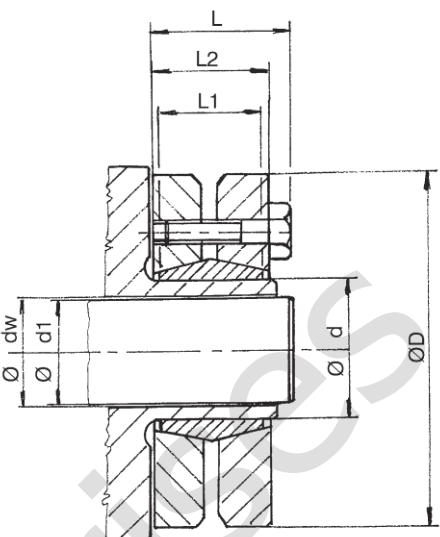



Dimensions

Part No.	Dimensions mm								Torque Cap. M Nm	Axial Force F kN	Surface Pressure Shaft Ps N/mm²	Clamping Screws			Approx Weight kg
	dw	Max* Clearance	d	D	L ₁	L ₂	L	X †				No.	Size	Torque Nm	
RCK19-24X50	19		24	50	14	19.5	23.0	18	170	18	286	6	M5	4	0.2
	20	210							21						
	21	250							24						
RCK19-30X60	24	0.017	30	60	16	21.5	25.0	18	300	25	233	7	M5	4	0.3
	25	340							27						
	26	380							29						
RCK19-36X72	28	0.032	36	72	18	23.5	27.5	20	440	31	307	5	M6	12	0.4
	30	570							38						
	31	630							41						
RCK19-44X80	32	0.032	44	80	20	25.5	29.5	20	620	39	317	7	M6	12	0.6
	35	780							45						
	36	860							48						
RCK19-50X90	38	0.032	50	90	22	27.5	31.5	25	940	49	289	8	M6	12	0.8
	40	1160							58						
	42	1380							66						
RCK19-55X100	42	0.032	55	100	23	30.5	34.5	25	1160	55	252	8	M6	12	1.1
	45	1520							68						
	48	1880							78						
RCK19-62X110	48	0.048	62	110	23	30.5	34.5	25	1850	77	279	10	M6	12	1.3
	50	2200							88						
	52	2400							92						
RCK19-68X115	50	0.048	68	115	23	30.5	34.5	25	2000	80	255	10	M6	12	1.4
	55	2500							91						
	60	3150							105						
RCK19-75X138	55	0.048	75	138	25	32.5	37.8	30	2500	91	273	7	M8	30	1.7
	60	3200							107						
	65	3950							122						
RCK19-80X145	60	0.048	80	145	25	32.5	37.8	30	3200	107	256	7	M8	30	1.9
	65	3900							120						
	70	4600							131						
RCK19-90X155	65	0.048	90	155	30	39.0	44.3	35	4750	146	271	10	M8	30	3.3
	70	6000							171						
	75	7250							193						
RCK19-100X170	70	0.048	100	170	34	44.0	49.3	35	6900	197	258	12	M8	30	4.7
	75	7500							200						
	80	9000							225						
RCK19-110X185	75	0.048	110	185	39	50.0	56.4	40	7200	192	244	9	M10	59	5.9
	80	9000							225						
	85	10800							254						
RCK19-125X215	85	0.069	125	215	42	54.0	60.4	40	11000	259	266	12	M10	59	8.5
	90	13000							289						
	95	15000							316						
RCK19-140X230	95	0.069	140	230	46	60.5	68.0	45	15100	318	264	10	M12	100	9.0
	100	17600							352						
	105	20100							383						
RCK19-155X265	105	0.069	155	265	50	64.5	72.0	50	22000	419	263	12	M12	100	11.0
	110	25000							455						
	115	28000							487						
RCK19-165X290	115	0.069	165	290	56	71.0	81.0	55	31000	539	277	8	M16	250	15.0
	120	35000							583						
	125	39000							624						
RCK19-175X300	125	0.079	175	300	56	71.0	81.0	55	36000	576	261	8	M16	250	15.8
	130	41000							631						
	135	45000							667						
RCK19-185X330	135	0.090	185	330	71	86.0	96.0	70	52000	770	237	10	M16	250	21.0
	140	57000							814						
	145	62000							855						

RCK 95



Similar in design to the Clamping Discs, type RCK 19, but with the discs spaced further apart to enable connection to more than one shaft, enabling use as a rigid shaft coupling. These units can be used to connect two identical diameter shafts which are perfectly aligned, or to produce a longer shaft which is only mounted in two bearings. Torque capacities are suitable for standard shafting. These units provide zero backlash shaft connection with advantage of fast assembly and disassembly. The design makes the unit equally suitable for horizontal and vertical shafts, capable of withstanding high axial loads.

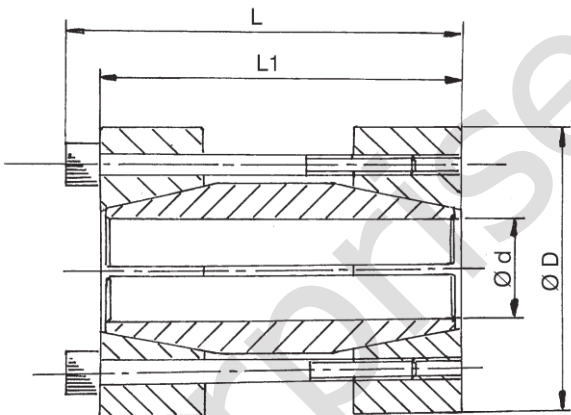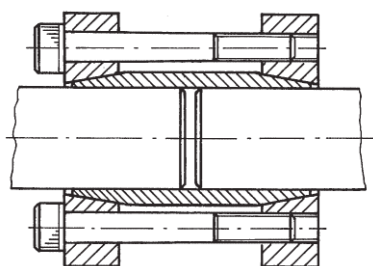

Dimensions

Part No.	Dimensions mm				Torque Cap. M Nm	Axial Force F kN	Surface Pressure		Clamping Screws			Approx Weight gms
	d	D	L	L1			Shaft Ps N/mm ²		No.	Size	Torque Nm	
RCK95-17X50	17	50	56	50	200	24	110		4	M6	17	0.46
RCK95-18X50	18	50	56	50	220	24	110		4	M6	17	0.45
RCK95-19X50	19	50	56	50	230	24	110		4	M6	17	0.44
RCK95-20X50	20	50	56	50	240	24	105		4	M6	17	0.44
RCK95-24X55	24	55	66	60	290	24	120		4	M6	17	0.65
RCK95-25X55	25	55	66	60	450	36	110		6	M6	17	0.63
RCK95-28X60	28	60	66	60	510	36	110		6	M6	17	0.75
RCK95-30X60	30	60	66	60	550	37	105		6	M6	17	0.71
RCK95-32X63	32	63	66	60	580	36	90		6	M6	17	0.73
RCK95-35X75	35	75	83	75	760	43	105		4	M8	41	1.33
RCK95-38X75	38	75	83	75	850	45	100		4	M8	41	1.20
RCK95-40X75	40	75	83	75	900	45	95		4	M8	41	1.19
RCK95-42X78	42	78	83	75	930	44	90		4	M8	41	1.28
RCK95-45X85	45	85	93	85	1520	68	110		6	M8	41	1.72
RCK95-48X90	48	90	93	85	1600	67	100		6	M8	41	1.90
RCK95-50X90	50	90	93	85	1690	68	95		6	M8	41	1.88
RCK95-55X94	55	94	93	85	2430	88	110		8	M8	41	2.00
RCK95-60X100	60	100	93	85	2680	89	95		8	M8	41	2.17
RCK95-65X105	65	105	93	85	2900	89	90		8	M8	41	3.95
RCK95-70X115	70	115	110	100	3720	106	90		6	M10	83	5.25
RCK95-75X125	75	125	110	100	3970	106	80		6	M10	83	5.46
RCK95-80X125	80	125	110	100	4280	107	70		6	M10	83	5.30


Installation Instructions

Installation and Removal of We Keyless Locking Elements

Types RCK 11, 13, 15, 16, 61,70,71,80

Installation:-

1. Slacken all screws in element by approx. two turns.
2. Remove two or three screws completely, and fit into equally spaced empty release thread holes. Tighten these screws lightly so as to ensure inner and outer cones are kept apart.
3. Clean all contact surfaces including screw threads, and lightly oil with clean thin unmodified oil.*
4. Insert clamping element into hub and push onto shaft and locate.
5. Remove screws from release holes and replace in original holes.
6. Tighten all screws finger tight and align hub.
7. Tighten all screws evenly in a diametrically opposite sequence (see typical progression in sketch) using a torque wrench, initially at half screw catalogue torque, then 3/4 value, and finally full torque. Check all screws at full torque until no further rotation of screws occurs.

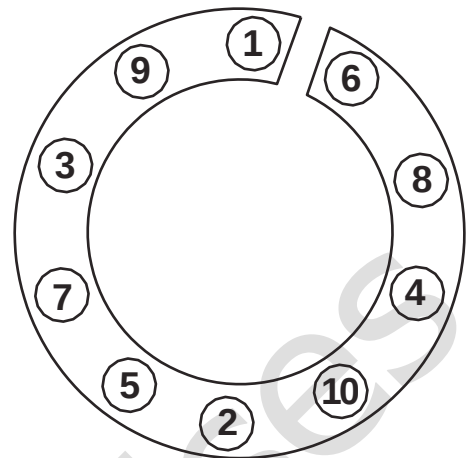

Disassembly:-

1. Slacken all clamping screws by couple of turns, completely removing as many as release holes in element.
2. Fit screws in release holes and tighten in sequence as clamping to force inner and outer cones apart.
3. Carefully remove hub and clamping element from shaft, and take element from hub.

Types RCK 40

Installation:-

1. Clean all contact surfaces, and lightly oil with clean thin unmodified mineral oil.*
2. Fit hub to shaft and insert clamping element.
3. Tighten all screws finger tight and align hub.
4. Tighten all screws evenly in a diametrically opposite sequence (see typical progression in sketch) using a torque wrench, initially at half catalogue torque for screw, then at 3/4 value, and finally at full torque. Check all screws are at full torque until no further rotation of screws can be achieved.

Disassembly:-

1. Release clamping screws in same sequence as for clamping. Element should now self release. If required lightly tap clamping screws to aid release. If still not released remove light coloured screws completely and replace with next larger metric size and tighten these screws to jack the cones apart.

Type RCK 50

Installation procedure depends detailed design, but following is typical:-

1. Clean all contact surfaces, and lightly oil with clean thin unmodified mineral oil.*
2. Push hub onto shaft and insert spacer sleeves and clamping ring sets according to application drawing.
3. Insert distance ring if fitted and attach clamping flange lightly tightening screws. Align hub.
4. Tighten all screws in a diametrically opposite sequence, in several stages up to max. torque for screw size.

Disassembly:-

The taper of the individual rings is such that the assembly should automatically release when the locking screws are slackened. If not light tapping on the hub circumference should release them.

Types RCK 19 and 95

Installation:-

1. Clean all contact surfaces, and lightly oil with clean thin unmodified mineral oil.*
2. Slacken all clamping bolts by a couple of turns.
3. (RCK 19 only) Fit clamping element on outer diameter of hub, and slide assembly onto shaft and position.
(RCK 95 only) Fit shaft ends equally into clamping element ensuring small clearance between shafts.
4. Tighten all bolts in a diametrically opposite sequence, in several stages up to max. specified torque.

Disassembly:-

Slacken all bolts and gently tap on bolts to release clamping element.

***WARNING: Never use, lubricant containing Molydenum or E.P. additives, synthetic lubricant, or grease.**